


249.00 EUR  
incl. 19% VAT, plus [shipping](#)

- J1900 ! JIMB-1900-6C !
- 6x USB !
- Power Onbaord !
- Thin miniITX !

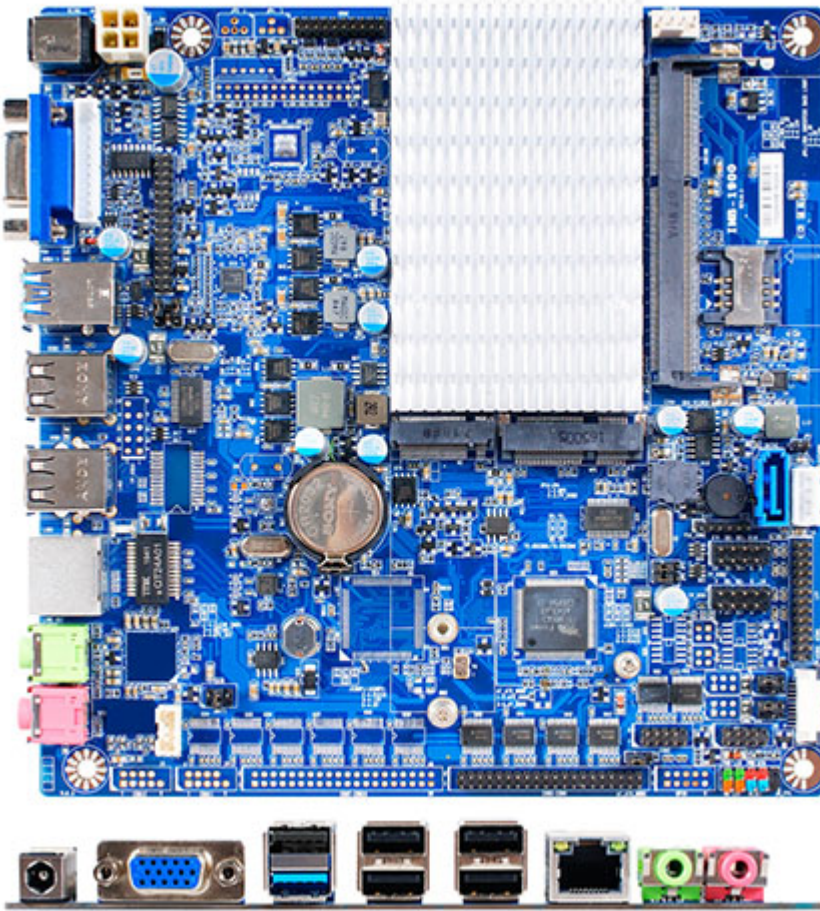

Support: [Datasheet](#)

- Intel® Quad Core J1900 processor
- ONE 204-pin SO-DIMM up to 8GB DDR3L 1333 MHz SDRAM
- Support 1\* VGA, 1\* HDMI
- Support 1\* Mini PCIe
- 1\* USB3.0, 9\* USB2.0, 6\* COM
- Thin Mini ITX Form Factor

<b>Chipset</b>	– INTEL® Celeron™ J1900 (2.0 GHz) quad-core processor – 2 Phase CPU Power Support
<b>I.O Chipset</b>	– FINTEK F81866AD-I
<b>Memory</b>	– 1*SO-DIMM slot – Support DDR3L 1333 – Max. capacity of system memory up to 8GB
<b>Expansion Slots</b>	– 1* Mini PCI-E connector
<b>Storage</b>	– 1* Serial ATA2 3Gb/s connector – 1* M.2 Connector(2242/2260)
<b>Ethernet LAN</b>	– REALTEK® RTL8111G Chip – 1* PCI Express Gigabit LAN
<b>EDP</b>	– 1*EDP
<b>USB</b>	– 1* USB3.0 Port – 9* USB 2.0(5 distribute in back panel, 4 distribute in mid-board)

<p><b>Special Features</b></p>	<ul style="list-style-type: none"> <li>- Support CPU Smart Fan</li> <li>- Support Watch dog Technology</li> <li>- Support VGA header</li> <li>- Support HDMI header</li> <li>- Support Power On board</li> <li>- Support 2* RS422/RS485/RS232 COM ports</li> <li>- COM1/COM2 Support TTL</li> <li>- Thunder Protection Function</li> <li>- All Solid Capacitor design</li> <li>- All Power Pack MOSFET design</li> </ul>
<p><b>Back Panel I/O</b></p>	<ul style="list-style-type: none"> <li>- 1* USB3.0 port</li> <li>- 5* USB 2.0 ports</li> <li>- 1* RJ-45 ports</li> <li>- 1* Line-out connector &amp; 1* MIC (No function)</li> <li>- 1* VGA port (Max. Resolution: 1920*1200@60Hz)</li> <li>- 1* 12V DC in</li> </ul>
<p><b>Internal I/O</b></p>	<ul style="list-style-type: none"> <li>- 2* USB 2.0 headers for 4 USB 2.0 ports</li> <li>- 1* CPU / Chassis Fan connectors</li> <li>- 6* COM headers</li> <li>- 1* Parallel header</li> <li>- 1* PS2/KB header</li> <li>- 1* 4-pin ATX 12V Power connector</li> <li>- 1* 4-pin SATA Power connector</li> <li>- 1* 15-pin VGA header (Max. Resolution: 1920*1200@60Hz)</li> <li>- 1* 20-pin HDMI header (Max. Resolution: 1920*1200@60Hz)</li> <li>- 1* eDP header (Max. Resolution: 2560*1600@60Hz)</li> <li>- 1* Mini PCI-e connector</li> <li>- 1* M.2 Connector(2242/2260)</li> <li>- 1* SATA Connector</li> <li>- 1* Speaker header (No function)</li> <li>- 1* Front panel header</li> <li>- 1* SIM Card socket</li> </ul>
<p><b>BIOS</b></p>	<ul style="list-style-type: none"> <li>- AMI 64MB SPI ROM</li> </ul>
<p><b>Temperature</b></p>	<ul style="list-style-type: none"> <li>- Operating: 0°C ~ 60°C</li> <li>- Storage: -20°C ~ 85°C</li> </ul>
<p><b>Form Factor</b></p>	<ul style="list-style-type: none"> <li>- Thin mini ITX Form Factor (170mm X 170mm)</li> </ul>