




129.00 EUR  
incl. 19% VAT, plus [shipping](#)

- NVIDIA Chipset !
- GeForce 8200 GFX !

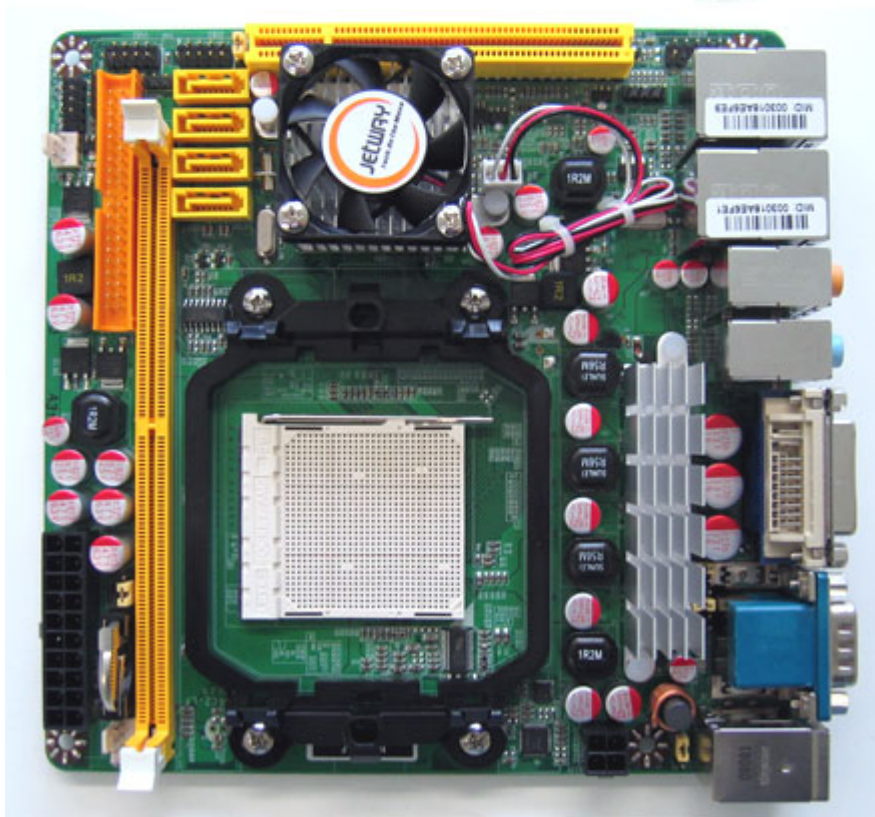

**Support:**  [Power Consumption](#)

- JNC62K (alias J6C2)
- NVIDIA NF-8200 (MCP78S) Chipset
- Support AMD socket AM2/AM2+ Quad Core Opteron™ & Phenom™
- Integrated GeForce 8200 GFX Core Processor
- Support HTT 3000Mhz
- Support 4 SATAII devices with RAID0, 1, 0+1, 5, JBOD
- Dual Gigabit LAN support, PXE support
- Support Blu-Ray and HD-DVD, H.264, VC1 and MPEG2
- Audio over DVI port
- 17 x 17CM Mini-ITX Form Factor

|                      |  |
|----------------------|--|
| Form Factor          | Mini-ITX 170 mm x 170 mm   |
| CPU                  | Socket AMD AM2 HTT 3000MHz AMD Opteron™ & Phenom™<br>With HyperTransport Technology  |
| Memory               | 1 * 240-pin DIMM socket for unbuffered Dual DDR2 800 SDRAM<br>up to 2GB  |
| Chipset              | NVIDIA NF-8200 (MCP78S) Single Chipset   |
| PCI enhanced IDE     | 2 * Ultra DMA 133/100 / 66 IDE Devices Support   |
| Serial ATA Interface | 4 * Serial ATA2 Devices with RAID 0, 1, 0+1, 5, and JBOD<br>- Integrated NVIDIA GeForce Series DirectX 10 Graphics<br>Processor<br>- Integrated 300MHz DAC for external Desktop Displays     |
| VGA Interface        | - Full HD-DVD and BluRay Video Decode<br>- Full bitrate H.264, VC1 and MPEG2 Video Decode<br>- Full nView® Multi-Display technology capability, with Two<br>independent display controllers. |
| Video Memory         | Share Memory up to 512MB   |
| Audio Interface      | ALC883 6-Channel Audio CODEC (TBD)   |
| LAN Interface        | Realtek RTL8211B PHY Gigabit Ethernet LAN<br>Realtek RTL8111C PCI-E Gigabit Ethernet LAN   |
| Extended Interface   | 1 * 32-bit PCI Slot<br>2 * High Speed USB Connectors @ 480 Mbit / s for 4 USB 2.0<br>Ports   |
| Internal I/O Port    | 1 * CPU Smart Fan, 2 * DC Fan Connectors<br>1 * CD / AUX Audio in & SPEAK Out<br>1 * SPDIF   |
| BIOS                 | Award 8 MB Flash ROM<br>6 * High Speed USB Connectors @ 480 Mbit / s<br>1 * DVI-I Port (with Audio)<br>1 * D-Sub 15-pin VGA Connector  |
| External I/O Port    | 2 * RJ45 Connectors<br>2 * Audio I / O<br>1* PS/2 Mouse & Keyboard<br>2 * RS232 Port (COM Port)  |
| Power Requirement    | 1 * 12V 4-Pin ATX Power Connector<br>1 * 20Pin ATX Power Connector   |
| Dimension            | 170mm x 170mm  |