


959.00 EUR
incl. 19% VAT, plus [shipping](#)

- NXP i.MX !
- 8x DI / 4x DO !
- CAN-BUS / CAN FD !

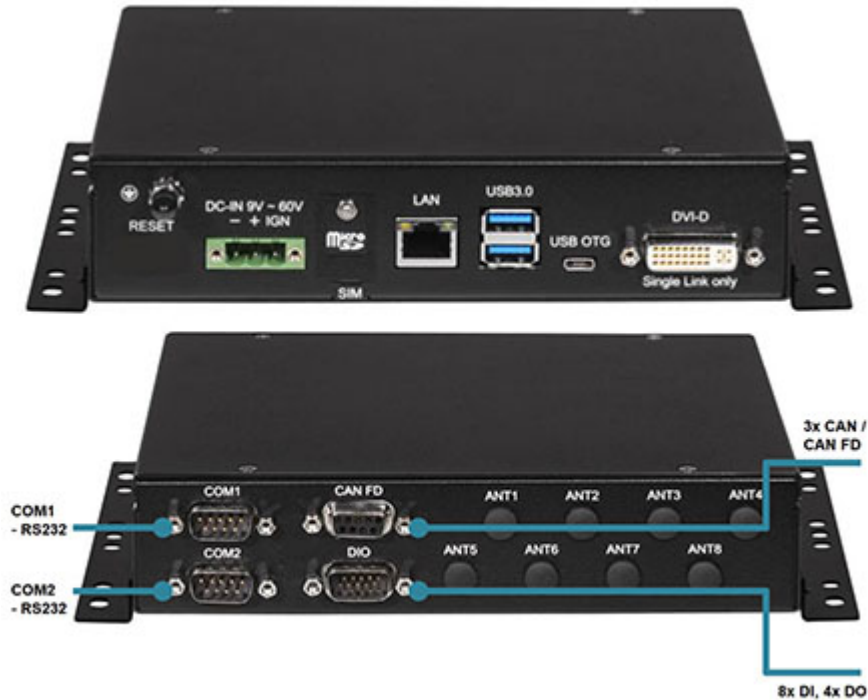

Support: [Specifications](#)

IBOX-500 is an ultra-compact fanless in-vehicle Computer with 5G or LTE connectivity. It utilizes NXP i.MX 8QuadXPlus Automotive AEC-Q100 Grade 3 Processor up to 1.2 GHz. IBOX-500 features an ultra-compact design which can easily fit into restricted spaces. As robust connectivity, the system can select 5G, LTE, GPS, and WIFI / Bluetooth by M.2 modules. It is the perfect solution for digital cluster and intelligent cockpit, and fleet management. Furthermore, it features smarter vehicle power Ignition and it can also effectively support cars in extreme weather and operating conditions, such as snowplows, Trucks, Buses, taxis, and Forklifts.

- Fanless
- NXP i.MX 8quadXPlus Automotive SoC (AEC-Q100 Grade 3)
- On-board LPDDR4 3GB and eMMC 5.1 32GB
- Built-in Accelerometer, Gyroscope, and Magnetic Sensor
- 3x CAN / CAN FD
- 1x DVI-D Single-Link (SINTRONES proprietary pin define)
- 8x DI, and 4x DO and 2x RS232
- 1x M.2 3042/3052 Key B, 1x M.2 2242 Key B, 1x M.2 Key A-E
- 1x Micro-SD SSlot
- 9-60V DC Power Input
- Operating Temp.: -40 - 70°C
- Optional 4G, 5G, WLAN, BT, GPS (M.2 modules)

| | |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions | 214mm x 150mm x 43mm, 1000g (Barebone) Operating : -40 - 70°C, ambient w/ 0.6m/s airflow Storage Temp: -40 - 80°C |
| Temperature | Relative Humidity: 10% RH - 90% RH (non-condensing) |
| CPU | NXP i.MX 8QuadXPlus Automotive SoC (AEC-Q100 Grade 3) Integrated 4x ARM Cortex-A35 cores Up to 1.2 GHz 1x ARM Cortex-M4F Core Up to 264 MHz |
| Memory | On-board LPDDR4 3GB / eMMC 5.1 32GB |
| Sensor | Build-in Accelerometer, Gyroscope and Magnetic Sensor |

| | |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Watchdog | 1 - 255 Level Reset |
| Graphics (CPU Guilt-in) | 1x GC7000Lite with 4x Vec4 shader cores (16 execution units) Max Resolution (DVI-D Single Link): 1920x1080 @ 60Hz 2x USB 3.2 5Gbps 1x USB 2.0 OTG 1x RJ-45 for GbE 1x DVI-D Single Link 1x RS232 8x DI (5-60VDC) |
| Inputs / Outputs | 4x DO (5VDC, 100mA) 3x CAN / CAN FD 1x MicroSD Slot Internal: 1x M.2 3042/3052 Key B for WWAN w/1 x nano SIM 1x M.2 2242 Key B for GPS 1x M.2 Key A-E for WIFI IEC60068-2-64 Random, 2.5G@5-500Hz, 1hr/axis |
| Vibration (with SSD) and Shock | MIL-STD-810G, Method 514.6, Procedure I, Cat.4, Operating Operating MIL-STD-810G Method 516.6, Procedure, Trucks and semi-trailers=15G (11ms) with SSD |
| Certifications | CE, FCC Class A, E13, ECE R118 9V-60V DC Power INput |
| Power Input: | Automatics Recovery Short Circuit Protection Vehicle Power Ignition for Variety Vehicle Power off Delay Timer setting by Software |